


NOTES

Dimensions repeat as detailed opposite ctr line if not shown.

If the top of the underfloor heating pipes is to be less than 50mm from the F.F.L., the following applies:

For each of the 9no floor socket locations, a 300 x 300mm square area should be left clear of underfloor heating pipes.

Plan view of folding arrangement

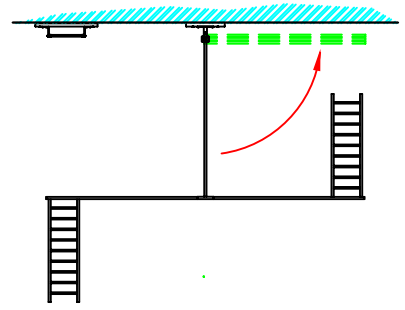

Tel:Huddersfield(01484)542051 Fax:(01484)539148

TIMBER FOLDAWAY CLIMBING FRAME (THREE GATES), Floor socket locations, inc ladder.

scale	date	dr	rev
NTS	11/1/06	RC	

dwg no **448-29**