


WINCH AT ONE END

Notes

Suitable support steel work should be provided approximately 3.5 metres in front and behind, the front face of the basketball board in the play position. The steel work installed must be capable of accepting 254 kgs S.W.L. at any point along it's length and two sections of steel at 1.2 metres centres are necessary.

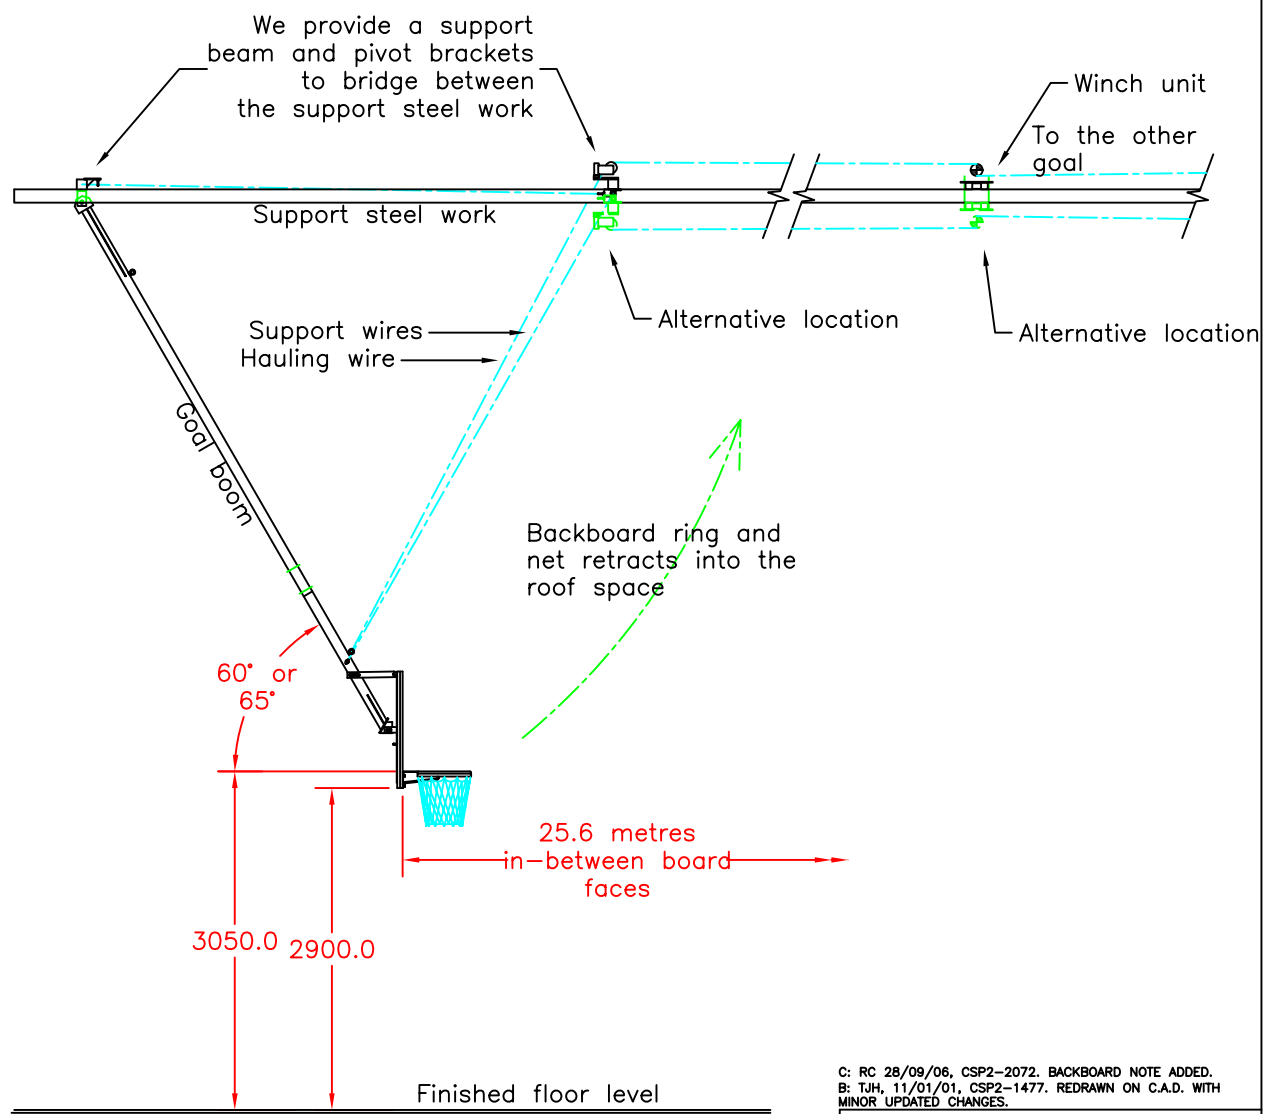

WINCH AT MID POINT

For front elevation refer to drawing no SH-04. Also see information sheets and drawing nos SH-06 and SH-07.

C: RC 28/09/06, CSP2-2072. BACKBOARD NOTE ADDED.
 B: TJH, 11/01/01, CSP2-1477. REDRAWN ON C.A.D. WITH MINOR UPDATED CHANGES.



Tel:Huddersfield(01484)542051 Fax:(01484)539148

SPORTS HALL, ELECTRIC WINCH OPERATED OVERHEAD RETRACTABLE BASKETBALL GOALS.

scale	date	dr	rev
1:50	11/01/01	T.J.H.	C

dwg no **SH-02**