


# Timber storming stands

07526A0XXX

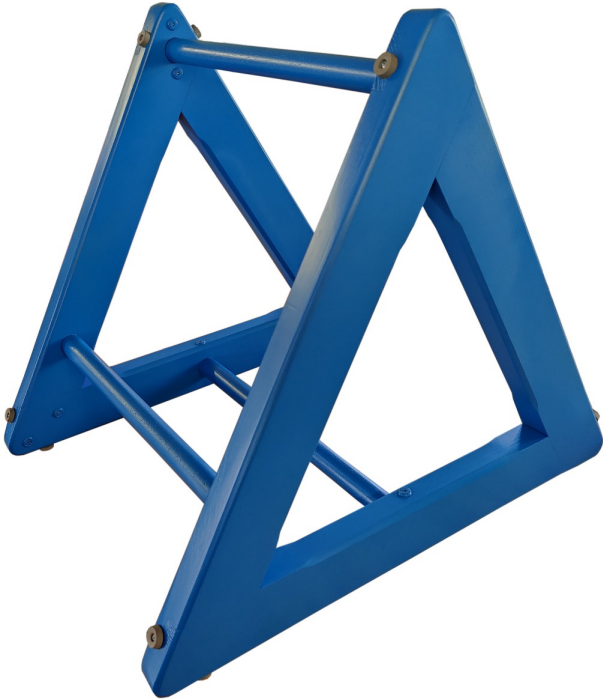

## Details

Traditional timber storming stands for use with PE linking and bridging apparatus.

Stable triangular construction enables linking at 3 different heights using linking apparatus available separately such as planks, ladders and poles.

The stands incorporate non-marking rubber feet on all sides.

Available in two sizes, each incorporating linking bars at three different heights:

- 0.6m (2') high
- 0.9m (3') high

And in five colours:

Clear lacquered timber

- Red
- Blue
- Green
- Yellow

| SKU          | Options        | Available Colours                                                                   |
|--------------|----------------|-------------------------------------------------------------------------------------|
| 07526A02AAY  | 0.6m (2') high |   |
| 07526A02AAG  | 0.6m (2') high |   |
| 07526A02AAB  | 0.6m (2') high |   |
| 07526A02AAR  | 0.6m (2') high |   |
| 07526A02AACL | 0.6m (2') high |                                                                                     |
| 07526A01AAY  | 0.9m (3') high |   |
| 07526A01AAG  | 0.9m (3') high |   |
| 07526A01AAB  | 0.9m (3') high |   |
| 07526A01AAR  | 0.9m (3') high |  |
| 07526A01AACL | 0.9m (3') high |                                                                                     |