
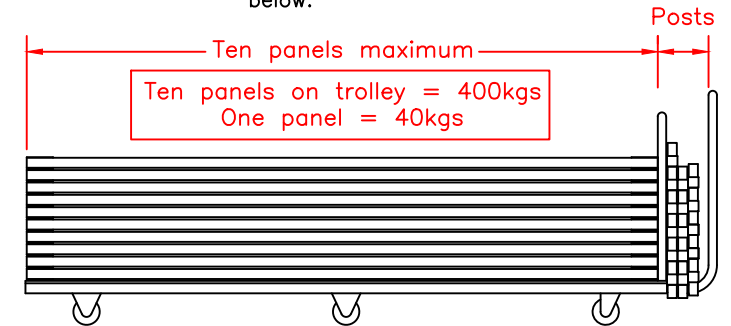


METHOD OF ASSEMBLING SCREEN
 Beneath each panel are two wheels which facilitate the moving of the panels from the store room to the screen position. The panel is wheeled into position and is then lifted so that the slots in the mild steel end plates are level with the lugs on the posts. The lugs are pushed through the cut outs and the panel is lowered to the floor. The panel is now locked into position.


STANDARD COLOURS
 Screen colours are usually green or blue to match netting. 24 other standard plain colours are available see Continental Sports web site or contact us to discuss.

ALSO AVAILABLE
 For added screen protection aluminium skirtings (200mm high x 2mm thick) can be fitted to one or both sides of the panels and gates. To help with the storage of the screens, there is a flat trolley which will take fifteen full panels and posts, shown below.

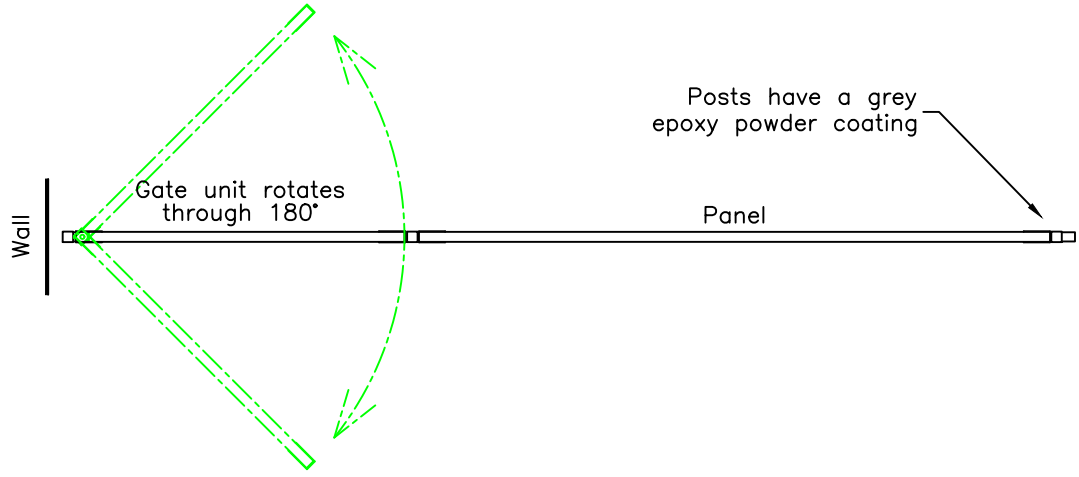


L: CR CSP2-2497 04/03/22. DRG UPDATED TO SHOW CHANGES TO SIZE & WEIGHT OF NEW STANDARD PANELS & GATE.
 K: RC CSP2-2234 9/7/08. GRANSPRUNG SOCKET ALTERED TO SILICONE SLEEVE TYPE.
 J: RC CSP2-2177 14/2/08. 10no PANELS ON TROLLEY ONLY.
 I: RC CSP2-2071 14/9/06. FLOOR SOCKETS UPDATED.
 H: TJH, 15/01/01, CSP2-1477. REDRAWN ON C.A.D. WITH MINOR UPDATED CHANGES.

Solid Floor Socket Details

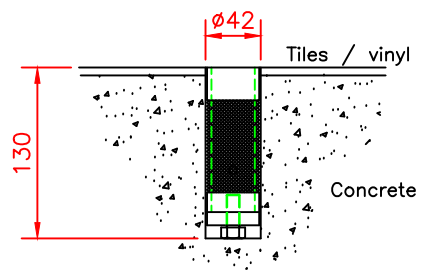

Sprung Floor Socket Details

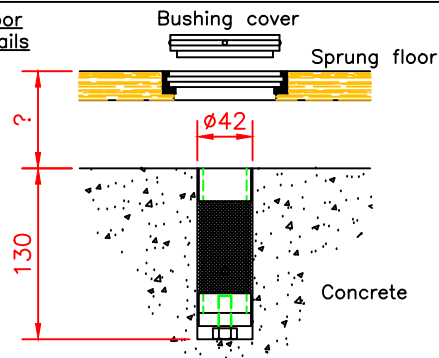

Tel:Huddersfield(01484)542051 Fax:(01484)539148

**SPORTS HALL, GENERAL
 5-A-SIDE REBOUND SCREEN
 DETAILS**

scale	date	dr	rev
1:20 & 1:2	15/01/01	T.J.H.	L

dwg no **SH-09**