


Notes

The beam supporting the trampoline spotting rig brackets should be able to accept 305 kgs load with an additional safety factor over this figure.

Construction details of the support beam are requested to be sent together with the height to the underside of the eaves, underside of the gusset and angle of the pitch.

See additional leaflet: Using the overhead spotting rig.

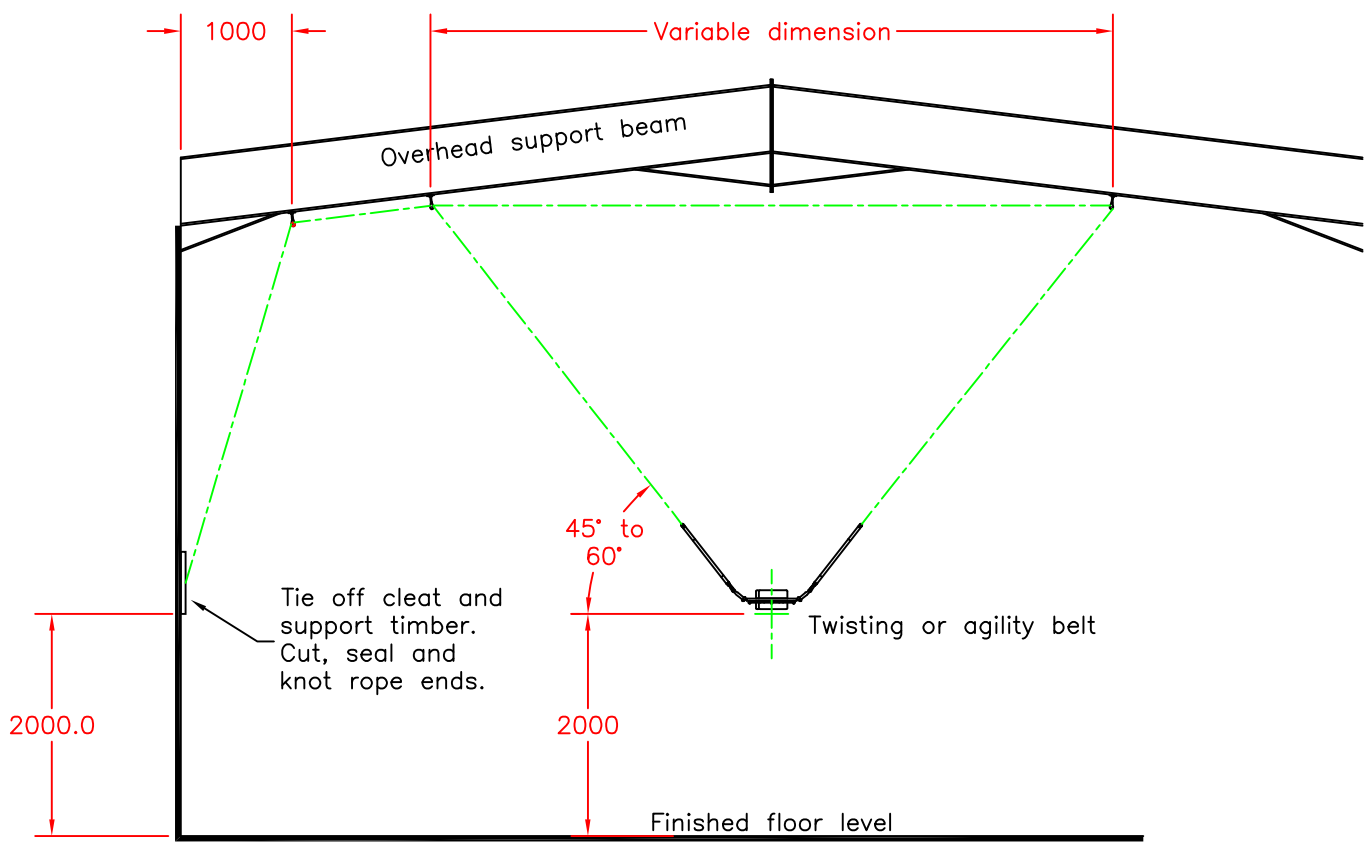

A: TJH, 12/01/01, CSP2-1477. REDRAWN ON C.A.D. WITH MINOR UPDATED CHANGES.



Tel:Huddersfield(01484)542051 Fax:(01484)539148

**SPORTS HALL, OVERHEAD TRAMPOLINE SPOTTING RIG DETAILS (PITCHED ROOF)**

scale	date	dr	rev
1:50	16/01/01	T.J.H.	A

dwg no **SH-13**